


VALVE AND STRAINER

BALL VALVE (SCREW TYPE)




BBS TYPE

■ SPECIFICATIONS

MAX. WORKING PRESSURE 1.96 MPa

MODEL No.	DIA.	L	W	H
BBS-1/4	8 A	40	60	31
BBS-1/2	15 A	54.5	80	42
BBS-3/4	20 A	61	100	51
BBS-1	25 A	75	100	55
BBS-1 · 1/4	32 A	80	150	66
BBS-1 · 1/2	40 A	84	150	69
BBS-2	50 A	102	150	75




HBS TYPE

■ SPECIFICATIONS

MAX. WORKING PRESSURE 1.96 MPa

MODEL No.	DIA.	L	W	H
HBS-50-10Rc	8 A	50	90	50
HBS-50-15Rc	15 A	65	90	55
HBS-50-20Rc	20 A	75	120	60
HBS-50-25Rc	25 A	85	120	65
HBS-50-32Rc	32 A	100	120	70
HBS-50-40Rc	40 A	109	150	75
HBS-50-50Rc	50 A	132	150	88




RBS TYPE

■ SPECIFICATIONS

MAX. WORKING PRESSURE 4.12 MPa

MODEL No.	DIA.	L	W	H
RBS-1/4	8 A	50	53	34
RBS-1/2	15 A	62	60	41
RBS-3/4	20 A	72	80	50
RBS-1	25 A	81	80	54
RBS-1 · 1/4	32 A	88	130	70
RBS-1 · 1/2	40 A	96	130	75
RBS-2	50 A	120	130	90


HIGH-PRESSURE CERTIFIED VALVE (FLANGE TYPE)

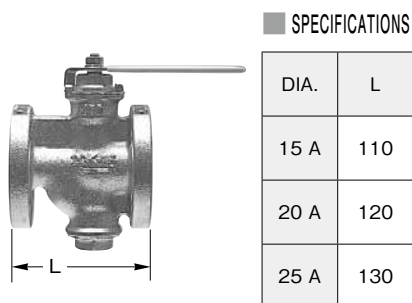

■ SPECIFICATIONS

DIA.	L
15 A	110
20 A	120
25 A	130

BM20K-FT
(STRAINER BALL VALVE TYPE)

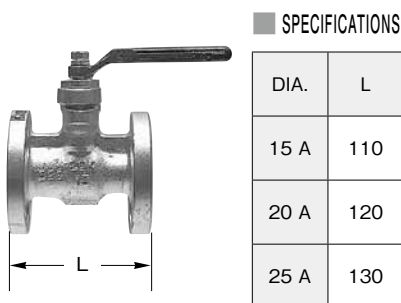


■ SPECIFICATIONS

DIA.	L
15 A	110
20 A	120
25 A	130

BM20K-FOLS
(BALL VALVE TYPE)

HIGH-PRESSURE CERTIFIED STRAINER

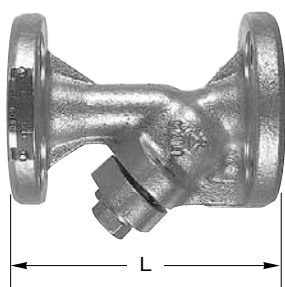


■ SPECIFICATIONS

DIA.	L
15 A	130
20 A	140
25 A	160

MG20K-FT
(FLANGE TYPE)

BASIC VALVES WITH HIGH-PRESSURE BACKFLOW PREVENTION



■ SPECIFICATIONS

DIA.	L	W	H
8 A	50	62	38

HBS-302-08Rc