


HS-26 Series Data


● 플랜지형 볼밸브 1.96MPa(20K) : 15A~400A [1.96MPa(20K) FULL PORT]

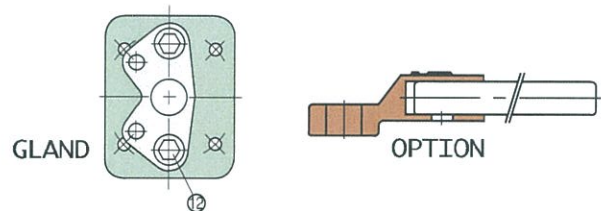

● Parts of Material

재질 : 스텐304/316/주강/덕타일

NO	PART NAME	MATERIAL	
1	BODY	SCPH 2	SSC 13/14
2	CAP	SCPH 2	SSC 13/14
3	BALL	SSC 13, STS 304	SSC 13/14
4	SEAT	RTFE	RTFE
5	STEM	STS 304, S45C	STS 304/316
6	PACKING	PTFE	PTFE
7	BACK SEAT	PTFE	PTFE
8	GLAND	SCPH2, SSC 13	SCPH 2, SSC 13
9	STOPPER	STS 304	STS 304
10	LEVER	SCPH2+ (CS+END)	SCPH2+ (CS+END)
11	SNAP RING	SK5M+ENP	SK5M+ENP
12	GLAND BOLT	SCM 435	STS 304
13	CASKET	PTFE	PTFE
14	HEX BOLT	SCM 435	STS 304
GEAR BOX UNIT		HWA SUNG Standard(200A and larger)	

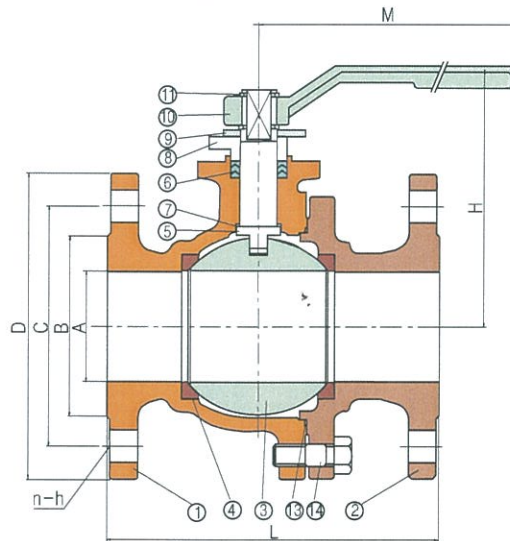

● Dimension

UNIT : mm

Valve Size	A	B	C	D	H	L	M	n-h	Weight (Kg)
15A	15	51	70	95	82	140	130	4-Ø15	
20A	20	56	75	100	85	152	130	4-Ø15	
25A	25	67	90	125	99	165	160	4-Ø19	
32A	32	76	100	135	103	178	160	4-Ø19	
40A	40	81	105	140	125	190	240	4-Ø19	
50A	50	96	120	155	133	216	240	8-Ø19	
65A	65	116	140	175	142	241	240	8-Ø19	
80A	80	132	160	200	174	283	240	8-Ø23	
100A	100	160	185	225	187	305	350	8-Ø23	
125A	125	195	225	270	205	381	350	8-Ø25	
150A	150	230	260	305	271	403	440	12-Ø25	
200A	200	275	305	350	360	502	380	12-Ø25	
250A	250	345	380	430	435	568	380	12-Ø27	
300A	300	395	430	480	460	648	380	16-Ø27	
350A	337	440	480	540	573	762	600	16-Ø33	
400A	387	495	540	605	626	838	600	16-Ø33	

Features:

- Blow Out Proof Stem
- Locking Device
- Lower break-away torque

Applicable Standards:

- Face-to-face Dimensions: KS B2308
- End Flange Dimensions: KS B1511
- Shell wall thickness: KS B2308
- ISO 5211 Mounting Pad: 50A and Larger
- Gearbox operated type: 200A and larger

· Specification is subject to change without prior notice due to function improvement.
· 본 제품은 품질개선을 위해 사전에 고없이 변경될 수 있습니다.