


SEWON

Safety First

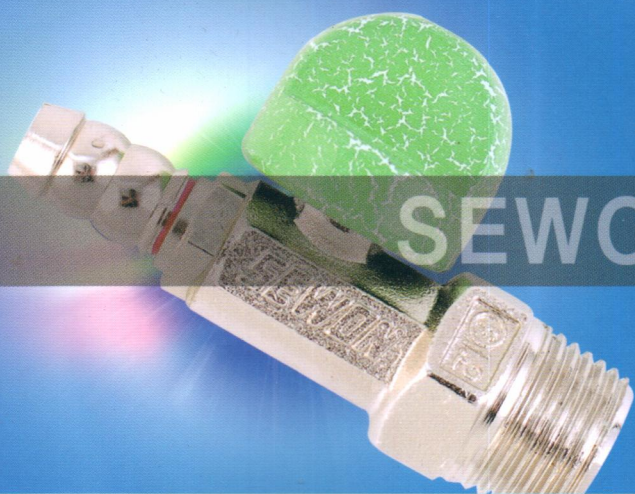

SEWON ENGINEERING ▶

FUSE COCKS

NOZZLE COCKS

VALVES

HIGH PRESSURE HOSE

용접 절단기용 LPG조정기(LP2)

SAFETY VALVES



LPG MANIFOLD EQUIPMENT

역화방지기/DRY FLASHBACK ARRESTOR
(0.13MPa이하, 0.1MPa이하)




세원엔지니어링
SEWON ENGINEERING

BALL VALVE

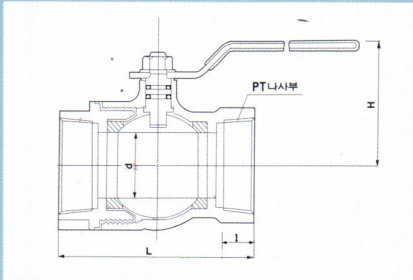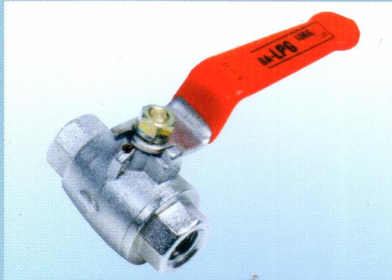

MODEL	8A
D(Hole Dia.)	Ø 6
SPEC.	PT 1/4"
H(Max)	44mm
L(Face fo face)	47mm

GLOBE VALVE (STOP VALVE)

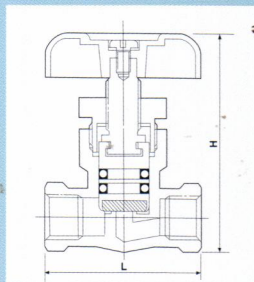

MODEL	8A	15A
SPEC.	PT 1/4"	PT 1/2"
L(Face fo face)	45±0.5mm	57±0.5mm
H(Max)	63mm	72mm
Pressure	2MPa	

용접 절단기용 LPG 압력조정기(LP2)



종 류	LP2	최대사용압력	0.15 MPa
최대입구압력	1.8 MPa	입구접속(Inlet)	W22.5좌 × 14산
정격입구압력	0.4 MPa	출구접속(Outlet)	M16 × 1.5P 좌
방 출 용 량	조정압력 0.05 MPa 표준유량 2 (M³/hr)	용 도	용접 절단기용 (용기용) 품질 보증기간 1년

SAFETY VALVE

Spring : Sus304



SPEC.	USE PRESSURE
*8A	1.76MPa
15A	
20A	
25A	

역화방지기 DRY FLASHBACK ARRESTOR (0.13MPa이하, 0.1MPa이하)

한국가스안전공사 검사품 : 0.1MPa이하 / 한국산업안전보건공단 인증품 : 0.13MPa이하



- ① R2(조정기용)
- ② T2(토치용)
- ③ M2(10A용)



- ① 아답타
- ② 이음대
- ③ 소켓
- ④ 조정기 앤드, 너트
- ⑤ LPG 앤드, 너트

※ 사용 압력에 따라 주문 제작 가능